



Shown on model 639 with transmission 722.6

- 1 Center console paneling
- 2 Bolt

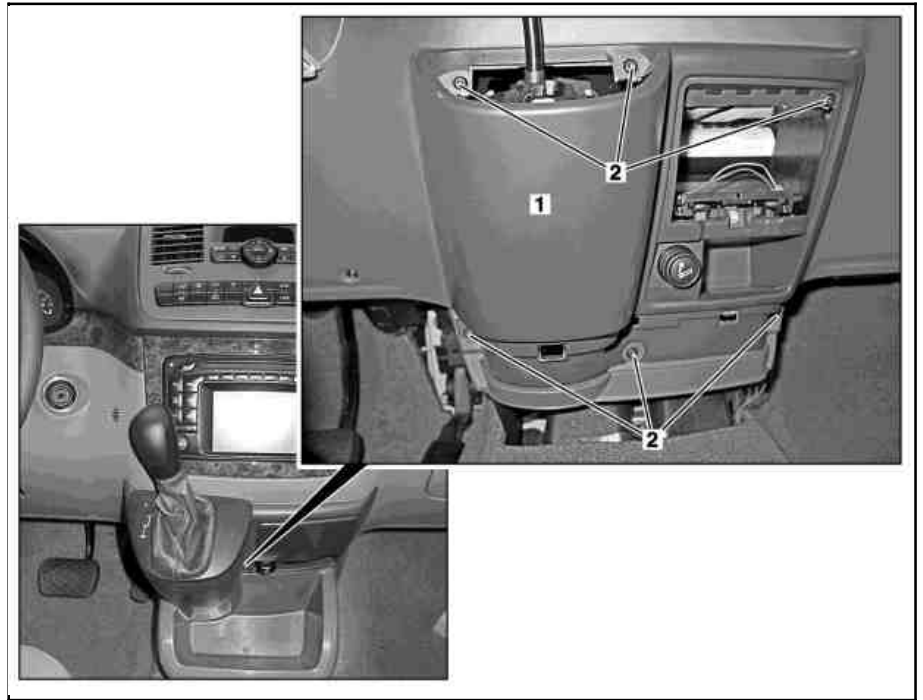

S68.20-4519-06

	Remove/Install		
1	Remove center console		AR68.20-S-2000S
2	Remove ashtray from front center console		AR68.20-S-2400S
3.1	Remove selector lever handle with covering	Transmission 722.6	AR27.60-S-0905S
3.2	Unclip shift lever paneling from center console paneling (1)	Transmission 716.6	
		Long wedge	*115589035900
4	Unscrew bolt (2)		
5	Remove center console paneling (1)	<p> For this purpose, pull center console paneling (1) toward rear. Disconnect electrical connector from cigarette lighter and remove center console paneling (1).</p> <p> Installation: Check mounting clips, replace if necessary.</p> <p> Long wedge</p>	*115589035900
6.1	Remove cigarette lighter	Only if center console paneling (1) is replaced	AR82.00-S-9999S
7	Install in the reverse order		
	Check		
8	Check whether center console paneling (1) is seated properly.		



115 589 03 59 00

Long wedge